

Noise Power Ratio Testing on a Budget

By Justin Crooks, Signal Hound – March 15, 2015

Introduction

Measuring intermodulation distortion is critical for the telecommunications industry. Two-tone IP3 testing is fine for many applications, but does not do a very good job of simulating actual channel conditions on a multi-carrier system, which more closely resembles bandwidth-limited white noise.

Noise power ratio (NPR) testing traditionally consists of a broadband Additive White Gaussian Noise (AWGN) source covering the entire bandwidth to be tested, and a deep, narrow notch filter somewhere within this bandwidth, typically 10% or less of the total bandwidth. The noise power ratio is the ratio of the signal power density to the power density of the notch, which is a combination of thermal noise and intermodulation products. While a band pass filtered noise source and notch filter may work in some cases, there is an easier way which is both inexpensive and far more flexible.

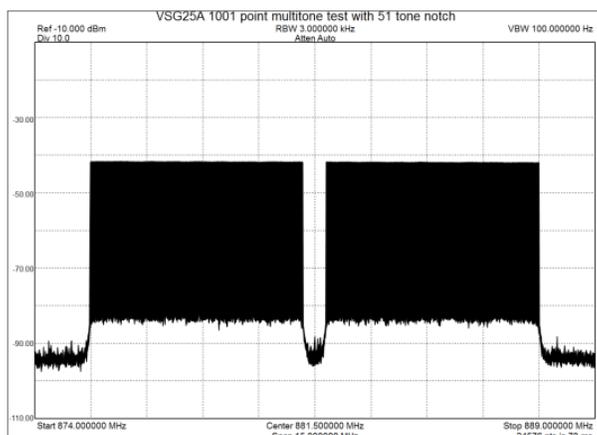


Figure 1: VSG25A test signal for NPR testing

By averaging together several successive measurements using 1000-tone sets that have random-phase relationships, the CCDF curves nearly converge. That means that this synthetic noise technique closely approximates the AWGN/notch filter technique. Synthetic noise also lends itself to automated testing because it exists completely in the digital domain. There is no bandpass filter that requires manual tuning.

A modern vector signal generator with 100 MHz of bandwidth, and capable of producing either digitally filtered AWGN, or 1000+ tones with a random phase relationship, is the foundation of modern NPR testing. Until now, these generators would cost you thousands, or even tens of thousands of dollars.

With the release of the new Signal Hound VSG25A, the cost of generating a 1001-tone notched test signal with up to 100 MHz of bandwidth is less than \$500.

NPR measurement requires that you analyze the RF spectrum before and after the device under test (DUT) is inserted. The signal and notch are both converted to power density, and then a ratio

Procedure for Testing NPR with the VSG25A and BB60C

1. Generate The VSG25A output signal
 - 1.1. Set the center frequency and amplitude
 - 1.2. Select Multi-tone
 - 1.3. Set tone spacing to 1/1000 desired noise bandwidth (1.00 kHz to 100 kHz)
 - 1.4. Select 1001 tones
 - 1.5. Enter desired notch frequency and width, and then click APPLY.
 - 1.6. Null out the LO feed-through
 - 1.6.1. Using the BB60C and Spike software, observe the VSG25A signal
 - 1.6.2. Set center and span so you are measuring only the notch.
 - 1.6.3. Peak search. This is the frequency of your LO feed-through
 - 1.6.4. Tweak I and Q offsets iteratively until the LO feed-through is at a minimum.
2. Measure your system noise for reference
 - 2.1. Using the channel power controls, enter a channel bandwidth approximately equal to your notch bandwidth, and channel spacing of approximately 25% more than your notch bandwidth.
 - 2.2. Set your span to about 5 times your notch bandwidth so you can see adjacent channel power.
 - 2.3. Look for the ACPR reading (in dBc). Average left and right ACPR for your system NPR noise floor.
 - 2.4. Set the BB60C reference level for best NPR (typically +/- 5 dB from input signal level).
3. Insert your DUT. If it is an amplifier, add fixed attenuation after the amplifier to approximately cancel the gain.
4. Measure NPR by averaging left and right ACPR. Record value.
5. On the VSG controls, click the APPLY button again. After about a second, a new set of random tone phases will be ready for your next reading.
6. Repeat steps 4 and 5 until around 10 measurements have been made. Average these for your NPR measurement at this input amplitude.
7. Increase or decrease signal level on the VSG. For best accuracy, increase or decrease attenuation after the amplifier as well. Otherwise, increase or decrease the BB60C's reference level.
8. Repeat steps 4-7 until all amplitudes are measured.
9. Plot results as NPR (dB) vs. input power (see Figure 3 on the next page).

